

Safe DIN-Rail-Mount Fuse Holders


The dead-front, modular disconnect fuse holders for “Midget” and “CC” fuses by ITC provide safe operation as well as easy assembly/disassembly and replacement of the fuse. Several options with or without blown fuse indication are available.

ITC Touch-Proof Modular Fuse Holders

As one of the established North American suppliers of finger-safe DIN rail mount fuse holders, ITC recognizes the benefits versus traditional open-style panel mount models. They are quickly mounted onto 35mm DIN rail, easily wired, and their dead-front, touch-proof design ensures operator safety during the replacement of blown fuses. They are available in 1, 1+N, 2, 3 and 3+N pole configurations and can be provided with integrated LED or NEON indicators for easy identification of blown circuits.

Our line of fuse holders offers a modern, modular design to match its comprehensive range of features. Assembly of single units into a multi-pole disconnect is extremely simple and quick.

Available in a midget (13/32” x 1 1/2” or 10x38mm) fuse version, or a rejection-style CC fuse version, with or without neon blown fuse indication. Also available are LED indicating versions for 24Vdc circuits.

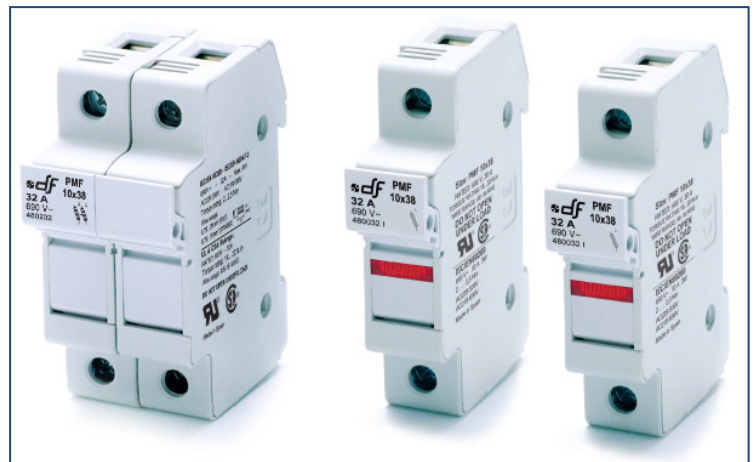

Technical Specifications:

- **Rated Voltage:** 600V (CSA, UL)
- **Maximum Fuse Rating:** 30A (CSA, UL)
- **Interrupting Capacity:** 100,000A rms symmetric (Midget); 200,000A rms symmetric (CC)
- **Nominal Wire Section:** 10AWG (6mm²)
- **Nominal Tightening Torque:** 13.6 in. lb.

CAUTION: FUSE HOLDERS MUST NOT BE OPENED UNDER LOAD


How to Order Series 400DF Fuse Holders and Accessories (Order by Part No.):

Part No.	Model /description	Certifications	Pack Qty
400.201	1-pole modular Midget fuse holder	CSA, UR	12
400.202	2-pole modular Midget fuse holder		6
400.203	3-pole modular Midget fuse holder		4
400.211	1-pole modular Midget fuse holder with NEON indicator 100-600VAC		12
400.212	2-pole modular Midget fuse holder with NEON indicator 100-600VAC		6
400.213	3-pole modular Midget fuse holder with NEON indicator 100-600VAC		4
400.241	1-pole modular Midget fuse holder with amber LED indicator 12-24VDC		12
400.242	2-pole modular Midget fuse holder with amber LED indicator 12-24VDC		6
400.243	3-pole modular Midget fuse holder with amber LED indicator 12-24VDC		4
400.501	1-pole modular “CC” fuse holder (rejection type)	CSA, UL	12
400.502	2-pole modular “CC” fuse holder (rejection type)		6
400.503	3-pole modular “CC” fuse holder (rejection type)		4
400.511	1-pole modular “CC” f/holder (rejection type) with NEON ind. 100-600VAC		12
400.512	2-pole modular “CC” f/holder (rejection type) with NEON ind. 100-600VAC		6
400.513	3-pole modular “CC” f/holder (rejection type) with NEON ind. 100-600VAC		4
400.095	Connector clip for body of 400DF units (2 are required between units)		12
400.096	Connector pin for handles of 400E units (1pc per assembly of 2 units)		12
450.091	Dummy fuse link 10x38mm		10



Information subject to change without notice- (*) Dummy fuse link can be used in “Midget” fuse holders only

Dimensions:

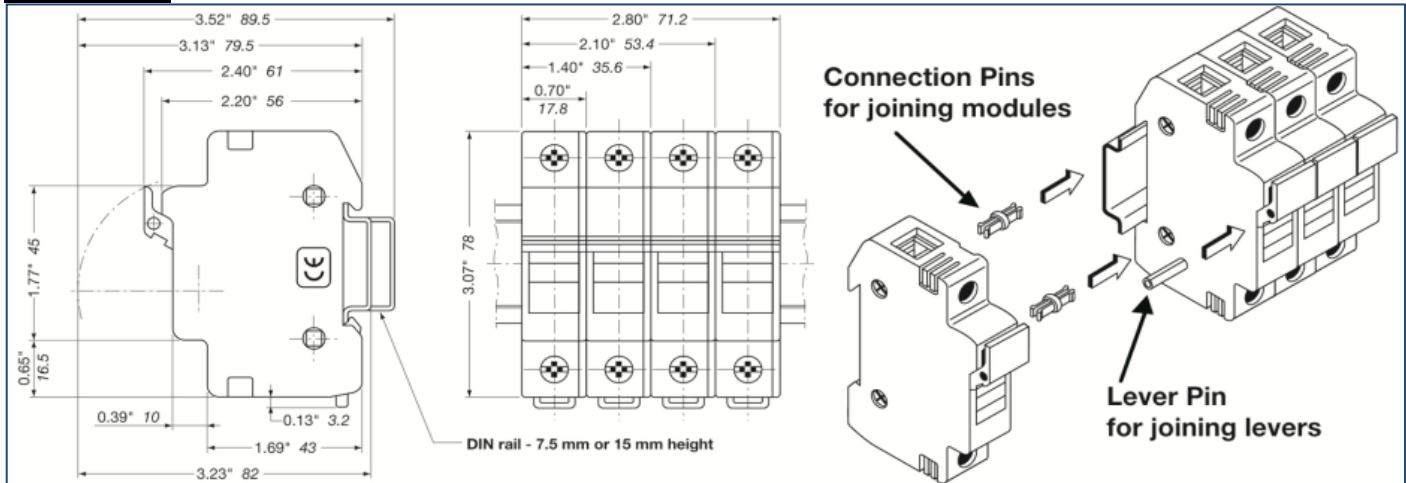

Fuses

ITC stocks several models of “midget” and “CC” fuses, to be used in its different models of fuse holders and fuse terminal blocks. Operating curves for the various types of fuses can be obtained upon request.



“MIDGET” Fuses and “CC” fuses

“MIDGET” fuses are also known as 10x38mm or 13/32”x1 1/2” fuses. They can be used **only** on all types of ITC “Midget” Fuse Holders described in the previous pages.

“CC” fuses have higher interrupting capacity (200,000A), are easily recognized by their bottle-shaped end cap, and can be used on either “CC” type (rejection) or “Midget” fuse holders.

How to Order MIDGET and CC Fuses (Order by Part No.):

Ratings	“MIDGET”			“CC”	Pack Qty
	10kA interr. Cap., 250V, fast acting	10kA interr. Cap., 250V, time delay	100kA interr. Cap., 600V, fast acting	200kA interr. Cap., 600V, time delay, “CC” type	
0.25A	-	-	-	450.514 (*)	10
0.5A	-	-	450.000 (*)	450.550	10
1A	450.201	450.101	450.001	450.501	10
1.5A	-	-	-	450.551 (*)	10
2A	450.202	450.102	450.002	450.502	10
2.5A	-	-	-	450.552 (*)	10
3A	450.203	450.103	450.003	450.503	10
4A	450.204	450.104	450.004	450.504	10
5A	450.205	450.105	450.005	450.505	10
6A	450.206	450.106	450.006	450.506	10
8A	450.208	450.108	450.008	450.508	10
10A	450.210	450.110	450.010	450.510	10
15A	450.215	450.115	450.015	450.515	10
20A	450.220	450.120	450.020	450.520	10
25A	450.225	450.125	450.025	450.525	10
30A	450.230	450.130	450.030	450.530	10

Information subject to change without notice - (*) Special order only