

Buzzers & Bi-colour 22.5mm Indicators

Features and specifications:

- Relative humidity: Maximum 85%
- Rated current: Maximum 20 mA
- Operational life: > 30,000 hours
- Brightness at rated voltage: LED indicators > 60 cd/m²
- Loudness: >70 dB/10cm
- Maximum voltage: +10% of rated voltage (AC)
- Minimum operating voltage: -15% of rated voltage (AC)
- Rated wire: 0.5 to 2.5mm² (22 to 14AWG)
- Terminal screw maximum torque: 0.8 Nm
- Operating temperature: -5 to 40 °C
- IP rating: LED indicators IP65, Buzzers IP2



Bi-colour Indicators (Order by Part No.)

Part No.	Colour	Cert.	See Figure
RB2-BU34-24V (AC/DC)	Green/Red	CE	1
RB2-BU34-110V (AC)	Green/Red	CE	1

Information subject to change without notice

Buzzers (Order by Part No.)

Part No.	Operation	Colour	Cert.	See Figure
RB2-BUZ1-24V (AC/DC)	Intermittent	Red	CE	2
RB2-BUZ1-110V (AC/DC)	Intermittent	Red	CE	2

Information subject to change without notice

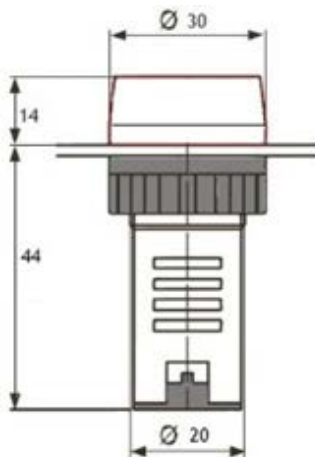


Figure 1 (mm)

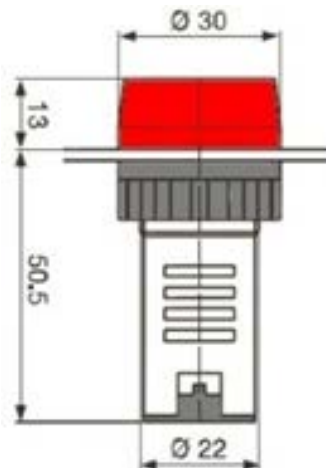


Figure 2 (mm)