




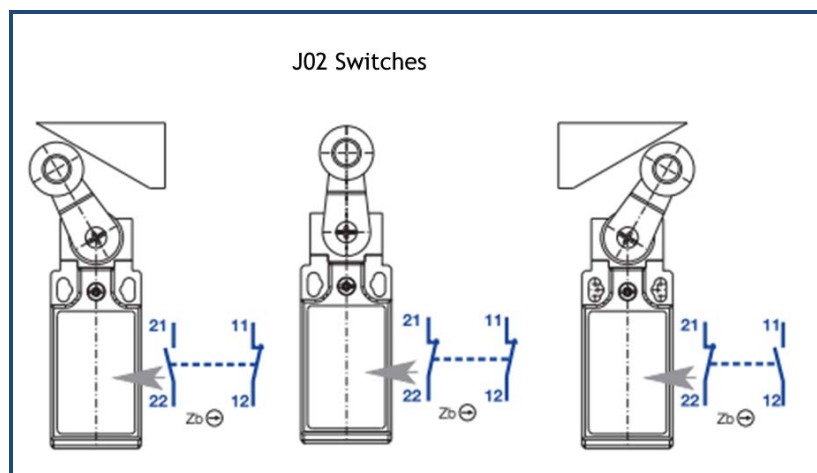
Independent-Action Position Switches

Comepi's J02 and J03 (2 and 3 pole) series of position switches operate different contacts when the lever-type actuator is moved from the central (neutral) position to the right or to the left. These switches are useful when the requirement exists to monitor the position, or centering, of an object, by using a single device. Previously, the same result would require the use of two different limit switches.




This functionality is obtained by using a special type of contact block mounted in COMETPI's standard sized 30 and 40mm thermoplastic switches series AP and BP.


2 Pole Independent-Action AP Series Position Switches (Order by Part No.)

						
Series	AP Series - 30mm Independent-Action Position Switches					
Actuator	Lever with nylon roller	Adjustable lever with nylon roller	Stainless steel rod (3mm dia.)			
Contacts	2NC slow					
Cable Entry - Part No	Pg13.5	AP1V41J02	Pg13.5	AP1V51J02	Pg13.5	AP1V71J02
	1/2"	AP2V41J02	1/2"	AP2V51J02	1/2"	AP2V71J02
	PG11	AP3V41J02	PG11	AP3V51J02	PG11	AP3V71J02
	M16x1.5	AP4V41J02	M16x1.5	AP4V51J02	M16x1.5	AP4V71J02
	M20x1.5	AP5V41J02	M20x1.5	AP5V51J02	M20x1.5	AP5V71J02
Lever on right	Opens contacts 11-12					
Lever on left	Opens contacts 21-22					
Body Material	UL-V0 thermoplastic fiberglass					
Body (WxD) mm	30.3 x 30mm					
Body (WxD) in	1.19 x 1.18 in					
IP Rating	IP65					
Approvals	cULus; #E189258					



3 Pole Independent-Action BP Series Position Switches (Order by Part No.)

						
Series	BP Series - 40mm Independent-Action Position Switches					
Actuator	Nylon roller lever	Adjustable nylon roller lever	Steel rod lever (3mm dia.)			
Contacts	3NC slow					
Connection - Part No	Pg13.5	BP1U41J03	Pg13.5	BP1U51J03	Pg13.5	BP1U71J03
	1/2"	BP2U41J03	1/2"	BP2U51J03	1/2"	BP2U71J03
	PG11	BP3U41J03	PG11	BP3U51J03	PG11	BP3U71J03
	M16x1.5	BP4U41J03	M16x1.5	BP4U51J03	M16x1.5	BP4U71J03
	M20x1.5	BP5U41J03	M20x1.5	BP5U51J03	M20x1.5	BP5U71J03
Lever on right	Opens contacts 11-12 and 21-22					
Lever on left	Opens contacts 31-32					
Body Material	UL-V0 thermoplastic fiberglass					
Body (WxD) mm	41 x 40.5mm					
Body (WxD) in	1.61 x 1.59 in					
IP Rating	IP65					
Approvals	cULus; #E189258					

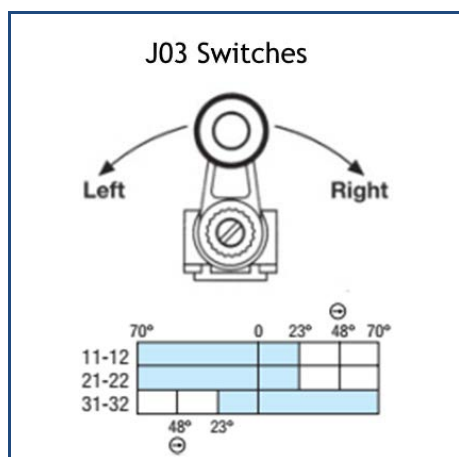

Other types of actuators available upon request; cold weather versions available upon request - contact ITC.