

Threaded Stopping Plugs

Plastic Threaded Stopping Plugs

Blind stops are used to temporarily or permanently seal a hole in a panel or machine. Use the corresponding plastic locknut when the hole is not threaded. Sealing quality can be improved by means of an additional sealing washer, mounted between the gland and the panel.

Available in Metric, Pg and NPT thread.

Features and specifications:


- Operating Temperature: -20 to 100°C (permanent)
- Standard colours: Black RAL9005 and light grey RAL7035
- Material: Polyamide 6

Plastic Threaded Stopping Plugs (Order by Part No.)

M/Pg/ NPT	Part No.		Dimensions (mm)				Pack
	Light Grey	Black	TD	TL	H	ØD	
Metric thread							
M12x1.5	188.012	188.112	12	6	4.5	15.0	100
M16x1.5	188.017	188.117	16	7	4.5	20.0	50
M20x1.5	188.020	188.120	20	7	5.5	24.0	50
M25x1.5	188.025	188.125	25	7.5	5.0	30.0	50
M32x1.5	188.032	188.132	32	9.5	4.0	39.0	25
M40x1.5	188.040	188.140	40	6	6.5	46.5	25
M50x1.5	188.051	188.151	50	10	4.0	57.0	10
M63x1.5	188.063	188.163	62	12	18.5	69.5	10
Pg Thread							
Pg7	188.007	188.107	12.5	6	2.0	15	100
Pg9	188.009	188.109	15.2	6	2.5	19	100
Pg11	188.011	188.111	18.6	6	2.5	22	50
Pg13.5	188.013	188.113	20.4	6	2.5	25	50
Pg16	188.016	188.116	22.5	6	3.0	27	50
Pg21	188.021	188.121	28.3	8	4.0	33	25
Pg29	188.029	188.129	37.0	8	3.5	44	25
Pg36	188.036	188.136	47.0	10	4.0	55	25
Pg42	188.042	188.142	54.0	10	5.0	62	10
Pg48	188.048	188.148	69.3	12	5.0	69	10
NPT/BSP Thread							
3/8" BSP	188.037●	-	16	7.5	6.0	18.0	100
1/2" NPT	-	188.150	20.0	7.0	4.5	25.0	50
1/2" BSP	188.049●	-	20.5	11.0	6.0	22.5	50

Information subject to change without notice

● hexagonal head

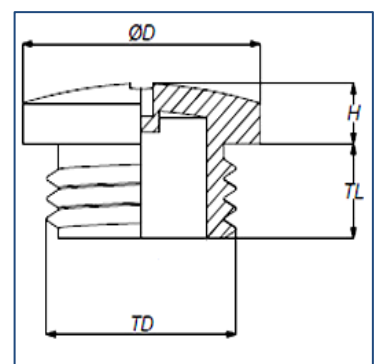

Metal Threaded Stopping Plugs

Blind stops are used to temporarily or permanently seal a hole in a panel or machine. Use the correspondent plastic locknut when the hole is not threaded. Sealing quality can be improved by means of an additional sealing washer, mounted between the gland and the panel.

Features and specifications:

- Round heads except where indicated
- **Operating Temperature:** -60 to 200°C
- **Material:** Brass, nickel plated

Metal Threaded Stopping Plugs (Order by Part No.)

M/Pg/ NPT	Part No.	Dimensions (mm)				Pack
		TD	TL	H	ØD	
Metric thread						
M12x1.5	188.712	12	5.0	3.0	16	50
M16x1.5	188.717	16	6.0	3.0	20	50
M20x1.5	188.720	20	6.5	2.5	24	10
M20x1.5	188.720H●	20	7.0	3.3	23/25.5	10
M25x1.5	188.725	25	7.7	3.0	28	10
M32x1.5	188.732	32	8.0	3.1	34.8	5
M40x1.5	188.740	40	8.0	4.0	43	1
M50x1.5	188.751	50	9.5	4.3	55	1
M63x1.5	188.763	63	10.0	5.0	62	1
Pg Thread						
Pg7	188.707	12.5	5.0	2.5	14	50
Pg9	188.709	15.2	6.0	2.5	17	50
Pg11	188.711	18.6	6.0	2.5	20	50
Pg13.5	188.713	20.4	6.0	3.0	22	50
Pg16	188.716	22.5	6.5	3.0	24	10
Pg21	188.721	28.3	7.0	3.8	30	10
Pg29	188.729	37.0	8.5	3.0	34	5
Pg36	188.736	47.0	9.0	4.5	50	5
Pg42	188.742	54.0	9.8	4.0	57	1
Pg48	188.748	59.3	10.5	4.0	64	1
NPT Thread (Hexagonal Heads)						
3/8" NPT	188.738●	17.1	15.0	3.0	19/21	25
1/2" NPT	188.750●	21.2	15.5	3.1	23.1/22.5	10
3/4" NPT	188.775●	26.7	21.0	4.5	29.2/32.5	5
1" NPT	188.791●	32.2	25.0	4.5	36/40	1

Information subject to change without notice
 ● Hexagonal head

