

## **Grounding Bars for Electrical Panels**

As a complement to its line of accessories for control panels, automation, wiring of electrical machinery, ITC now presents a line of brass grounding/neutral bars.


## Features:

- Three convenient sizes:
  - 7x9 mm (approx. 9/32"x11/32")
  - 8x12mm (approx. 5/16"x15/32")
  - 12.70x12.70 mm (approx. ½" x ½")
  - Length is 500 mm (approx. 20")
  - Can be easily cut to length with a hacksaw
- Made of brass, non-plated: excellent conducting features at a fraction of copper prices
- Two models of insulating supports are available
- All holes are pre-threaded (metric M3, M4 or M5 threads)
- Lightweight and economical
- Available from stock in Canada

## How to order (Order by Part No.)

| Part No. | Model    | Description   | Number of terminals    | Pack Qty |
|----------|----------|---|------------------------|----------|
| 710.407  | CGB0709  | Grounding bar 7x9x500mm                               | 64 (M5)                | 1        |
| 710.408  | CGB0812  | Grounding bar 8x12x500mm                              | 60 (M4)                | 1        |
| 710.412  | CGB1212  | Grounding bar 12.7x12.7x500mm                         | 2 rows of 62 each (M3) | 1        |
| 710.409  | CGBSUP   | Plastic support for panel, dim. 30x15x16 mm           | -                      | 10       |
| 710.410  | CGBDIN-S | Polyamide support for DIN Rail 35 mm, dim. 42x16x17mm | -                      | 10       |

Information subject to change without notice

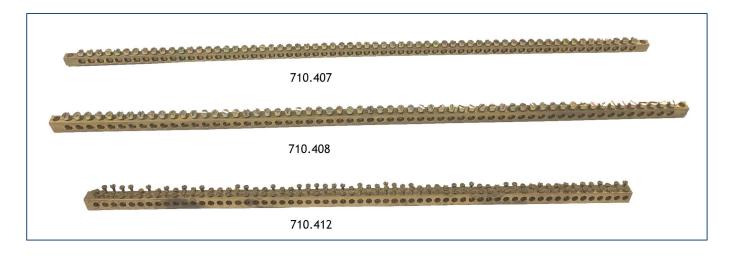

Printed in Canada; 24-03 EB2007-7









710,409

710.410